(19)日本国特新庁 (JP) (12) 公開特許公報 (A)

庁内整理番号

(11)特許出顧公開番号

特開平8-76706

(43)公開日 平成8年(1996)3月22日

(51) Int.Cl.6

識別記号

FΙ

技術表示箇所

G09F 19/00 H04B 7/26

H04B 7/26

E

審査請求 未請求 請求項の数2 FD (全 5 頁)

(21)出顯番号

特顧平6-238657

(22)出願日

平成6年(1994)9月7日

(71)出願人 000004226

日本電信電話株式会社

東京都新宿区西新宿三丁目19番2号

(72)発明者 鈴木 達郎

東京都千代田区内幸町一丁目1番6号 日

本電信電話株式会社内

(72)発明者 塚田 晴史

東京都千代田区内幸町一丁目1番6号 日

本電信電話株式会社内

(72)発明者 岸田 克己

東京都千代田区内幸町一丁目1番6号 日

本館信電話株式会社内

(74)代理人 弁理士 山本 惠一


最終頁に続く

(54) 【発明の名称】 電子広告方法及び装置

(57)【要約】

【目的】 店舗の近傍の移動体に対してのみ無線で広告 情報を送信することを目的とする。

【構成】 広告発信原から移動体に対して広告情報を伝 達する電子広告において、前配移動体の位置を検出し、 検出された位置情報を用いて、前配広告発信源に対し所 定の距離以内にある移動体の識別番号を検出し、当該移 動体に対し前配広告発信源から識別番号にもとづいて広 告情報を無線で発信し、当該移動体はその広告情報を受 信し、広告発信源から所定の距離以内の移動体に対して のみ広告情報を送信する。



本発明によるシステムの概要構成

ALCOHOL: SELECTION

1

【特許請求の範囲】

【請求項1】 広告発信源から移動体に対して広告情報 を伝達する電子広告方法において、

前記移動体の位置を検出し、

検出された位置情報を用いて、前記広告発信源に対し所 定の距離以内にある移動体の識別番号を検出し、

当該移動体に対し前記広告発信源から識別番号にもとづいて広告情報を無線で発信し、

当該移動体はその広告情報を受信し、

広告発信源から所定の距離以内の移動体に対してのみ広 10 告情報を送信することを特徴とする電子広告方法。

【請求項2】 公衆通信網に接続され、無線により移動 体に広告を発信する広告発信源と、

無線により前記公衆通信網に接続され、識別番号を有する移動体と、

該移動体の位置を検出する位置検出手段と、

位置輸出手段により検出された移動体の位置を当該移動 体からの送信により収集する移動管理センタとを有し、 該移動管理センタが、広告発信源に対し所定の距離以内 にある移動体を当該広告発信源に通知することにより、 当該広告発信源は当該移動体の輸別番号にもとづいて当 該移動体に広告情報を送信することを特徴とする電子広 告装置。

【発明の詳細な説明】

[0001]

「産業上の利用分野」本発明は、広告発信源、例えば、店舗から、該店舗に向かって近づきつつある、移動体に対して、情報を送信する方法に関する。本発明は、例えば、携帯端末を所持して店の前を通りかかる人や、道路に沿って店に近づく車に対して、店の広告情報を送信す 30 る場合に適用することができる。

Editor Holling

[0002]

【従来の技術】従来、通信による広告情報の伝達方法 は、客のほうから店に問い合わせるか、店からは移動体 の位置に関係なく電話番号か個人番号を指定する方法が 行われている。

【0003】従って、広告を送って効果的な相手、即ち、店の近くにいる移動体、さらに店に近づきつつある 移動体のみに対して、店から通信を行うことができなかった。

[0004]

【発明が解決しようとする課題】本発明の目的は、上記 従来の問題点を解決し、店に近づきつつある移動体を検 出し、店から該移動体に対して電子広告を送信する方法 を提供することにある。

[00005]

【課題を解決するための手段】前記目的を達成するための本発明の特徴は、広告発信原から移動体に対して広告情報を伝達する電子広告方法において、前記移動体の位置を検査を担任を記していた位置情報を用いて、前記広告発 50

信源に対し所定の距離内にある移動体の識別番号を検出し、当該移動体に対し前記広告発信源から識別番号にもとづいて広告情報を無線で発信し、当該移動体はその広告情報を受信し、広告発信源から所定の距離以内の移動体に対してのみ広告情報を送信する電子広告方法にある。なお、ここで広告とは、宣伝、販売のための広告ばかりでなく、一般の情報伝達を意味するものとする。

[0006]

【作用】本発明は、店舗から電子的に広告情報を発信する電子広告サービスにおいて、店舗に近づきつつある移動体を、その位置情報の変化と、移動経路(道路)情報とから検出する手段を用いて、そのID(電話番号)を知り、該移動体に対してのみ電子広告を行うことで、より有効に広告を行う。

[0007] 移動体の位置情報を定期的に収集することで、移動体の移動方向を求めることができる。移動体の位置および移動方向と、道路地図情報とから、移動経路を求めることができる。移動経路と店舗の位置情報とから、店舗に近づきつつある移動体およびその通信 I Dを知ることができる。店舗に近づきつつある移動体にのみ、電子広告を送信することで、効果的な宜伝を行うことが可能となる。

[0008]

【実施例】図1は一実施例におけるシステムの概要構成である。1は広告発信を行う店舗、2は広告受信可能な移動体(モードによって受信拒否も可能)、3は移動管理センタ、4はGPSなどの位置検出用インフラである。

【0009】図6は実施例における詳細なシステム構成である。図6において、1は店舗で、通信装置と電子広告発信装置とを持つ。2は移動体で、位置検出装置と、電子広告受信装置(受信可/不可のモードを持つ)、移動体通信装置とを持つ。3は移動管理センタで、店舗データベース、移動体管理データベース、接近移動体検出装置、通信装置とを持つ。

【0010】ガソリンスタンド広告の例で、サービスの概要を説明する。

【0011】移動体から見たサービスの概要は次のようになる。


- 40 【0012】(1)各移動体は、これからガソリンスタンドで給油を行いたいとき、移動体の広告受信装置を広告受信モードに設定する(10)。
 - (2) その移動体の進行経路方向にある複数のガソリン スタンドから、移動体通信を用いて電子広告情報がその 移動体に対して送られる。
 - (3) 移動体の使用者は、条件に合うガソリンスタンド を選択し、広告情報に従って、進入停止し、サービスを 受ける。
- 【0013】図4と図5によりシステムの動作の流れを 50 説明する。

【0014】図4は、移動体・移動管理センタ・店舗の 動作および間でやりとりする情報の流れを示したもので ある。

[0015] 図5は、図4で示した各情報の詳細な内容を記述したものである。

- 【0016】(1)各広告発信店舗1は、自己位置と店舗種別と広告対象範囲(エリア指定、方向指定、車種指定)を3の移動管理センタに登録しておく(12)。
- (2) 各移動体 2 は、使用者の設定により広告受信モード(10)になると、移動管理センタ 3 に自己 I D(電 10 話番号)を登録する。なお、受信モードを終了した場合は登録を抹消される。
- (3) 広告受信モードの各移動体2は、定期的に4を用いて自己位置を検出し(16)、移動管理センタ3に該位置情報を送信する。
- (4)移動管理センタ3は登録された移動体ごとに位置の変化を検出し、現在エリア、進行経路(道路)と進行方向を検出する。この時、道路の曲がり具合により、位置座標的に遠ざかっていても、近づいていると見なすこともある(図2)。
- (5) 移動管理センタ3は(4)で得た情報を道路およびエリアごとに分類して移動体電話番号と共にテーブルに管理する(図3)。
- (6) 移動管理センタ3は(1)で指定された条件に合

[図1]



[図3]

134号線 横須賀エリア 上リ	134号線 横須賀エリア 下り	
123-4567	321-7654	
987-6543	789-3455	

EXHIBIT D

致する接近移動体のID情報(電話番号、車種など)を 該当する登録店舗1に通知する。

(7) 登録店舗1は自己店舗に近づきつつある移動体2 に対して、(6)で得たIDを用いて発信し、電子広告 情報(店舗名、価格、サービス特徴、ナビゲーション地 図情報など)を伝送する。

[0017]

【発明の効果】以上説明したとおり、本発明は店舗の近 傍の移動体に対してのみ電子広告を送信するので、効果 的な宜伝を行うことができる。

【図面の簡単な説明】

【図1】本発明の実施例によるシステムの概要構成を示 *

- 【図2】位置座標と道路の曲がりの関係を示す。
- 【図3】移動管理センタの管理情報を示す。
- 【図4】本発明の動作の流れを示す。
- 【図5】各情報の詳細な内容を示す。
- 【図6】本発明によるシステム構成を示す。


【符号の説明】

20 1 店舗

100


- 2 移動体
- 3 移動管理センタ
- 4 位置検出手段

[図2]




道路マップ情報を吊いることで厳観的に遠ざ かっていても近づいているとみなす例

[图4]

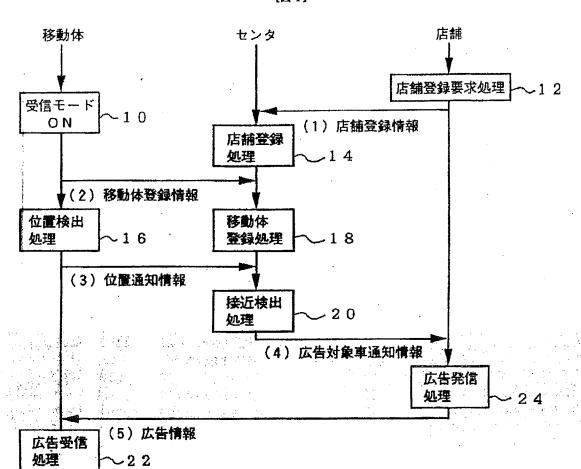

【図6】

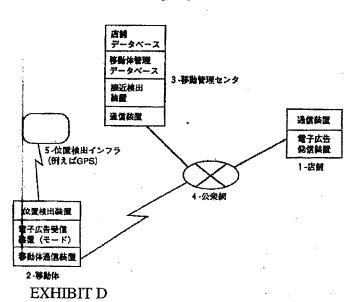

【図5】

(1)店舗登録情報

緯度 - 経度 店舗種別(ファミリレストラン) 電話番号 対象エリア指定 134号線横須賀エリア

対象車種指定 自家用車、トラック 上り線のみ

(2)移動体登録情報

緯度・経度
享両情報(享種、人数)
電話賽号
対象業種 レストラン

(3) 通知位置情報

韓度・経度 電話番号

(4) 広告対象車通知情報

電配番号 車両情報 車種・人数 緯度・経度 エリア情報

(5) 広告情報

店舗名
分類 (レストラン)
サービスメニュー
ナビゲーション
情報

フロントページの続き

(72)発明者 酒井 和男

東京都千代田区内幸町一丁目1番6号 日

本電信電話株式会社内

(19) Japan Patent Office (JP)

(12) Japanese Unexamined Patent Application Publication (A)

(11) Japanese Unexamined Patent Application Publication Number

H8-76706

(43) Publication date: March 22, 1996

(51) Int. Cl. ⁶	Identification codes	JPO file numbers	FI	Technical indications
G 09 F 19/00 H 04 B 7/26	* A			
			H 04 B 7/26	E

Request for examination: Not yet requested Number of claims: 2 FD (Total of 5 pages)


(21) Application number	Japanese Patent Application H6-238657	(71) Applicant	000004226 Nippon Telegraph & Telephone Corporation
(22) Date of application	September 7, 1994		3-19-2 Nishi-Shinjuku, Shinjuku-ku, Tokyo
	,	(72) Inventor	Tatsuro Suzuki c/o Nippon Telegraph & Telephone Corporation 1-1-6 Uchisaiwai-cho, Chiyoda-ku, Tokyo
· ·		(72) Inventor	Seiji Tsukada c/o Nippon Telegraph & Telephone Corporation 1-1-6 Uchisaiwai-cho, Chiyoda-ku, Tokyo
and the second second		(72) Inventor	Katsumi Kishida c/o Nippon Telegraph & Telephone Corporation 1-1-6 Uchisaiwai-cho, Chiyoda-ku, Tokyo
ng ng king sa katalan sa katalan Na sa katalan sa katal Na sa katalan sa katal		(74) Agent	Patent Attorney Keiichi YAMAMOTO Continued on the last page

(54) (TITLE OF THE INVENTION) ELECTRONIC ADVERTISEMENT METHOD AND DEVICE

(57) (ABSTRACT)

(PURPOSE) The purpose of the present invention is to wirelessly transmit advertisement information only to moving bodies in the vicinity of a store.

(CONSTITUTION) In an electronic advertisement method for advertisement information from transmitting advertisement transmission source to moving bodies, the positions of the moving bodies are detected; the identification numbers of moving bodies within a prescribed distance from the advertisement transmission source are detected using the detected position information; advertisement information is wirelessly transmitted to the moving bodies from the advertisement transmission source based on the identification numbers; and the moving bodies receive this advertisement information; whereby the advertisement information is transmitted only to moving bodies within the prescribed distance from the advertisement transmission source.



General configuration of a system based on the present invention

(SCOPE OF PATENT CLAIMS)

(CLAIM 1) An electronic advertisement method for transmitting advertisement information from an advertisement transmission source to moving bodies, wherein:

the positions of said moving bodies are detected;

the identification numbers of moving bodies within a prescribed distance from said advertisement transmission source are detected using the detected position information;

advertisement information is wirelessly transmitted to said moving bodies from said advertisement transmission source based on the identification numbers; and

said moving bodies receive this advertisement information;

whereby the advertisement information is transmitted only to moving bodies within the prescribed distance from the advertisement transmission source.

(CLAIM 2) An electronic advertisement device having:

an advertisement transmission source which is connected to a public communications network and wirelessly transmits advertisements to moving bodies;

moving bodies which are wirelessly connected to said public communications network and have identification numbers;

a position detection means which detects the positions of said moving bodies; and

a movement management center which collects the positions of moving bodies detected by the position detection means using transmissions from said moving bodies;

wherein said movement management center notifies said advertisement transmission means of moving bodies within a prescribed distance from the advertisement transmission source, and said advertisement transmission source thereby transmits advertisement information to said moving bodies based on their identification numbers.

(DETAILED DESCRIPTION OF THE INVENTION)
(0001)

(INDUSTRIAL FIELD OF APPLICATION) The present invention relates to a method for transmitting information to moving bodies from an advertisement transmission source – a store, for example – to moving bodies approaching the store. The present invention can be applied to situations in which the advertisement information of a store is transmitted to people possessing mobile terminals who pass in front of the store or vehicles approaching the store along the road.

(0002)

(PRIOR ART) Conventionally, methods for transmitting advertisement information using telecommunications have entailed customers enquiring at the store or the store designating telephone numbers or personal numbers regardless of the positions of the moving bodies.

(0003) Therefore, it was not possible for a store to communicate only with an audience for which it would be effective to send advertisements — in other words, moving bodies close to the store and moving bodies moving closer to the store.

(0004)

(PROBLEM TO BE SOLVED BY THE INVENTION) The purpose of the present invention is to solve the problem of the prior art described above and provide a method for detecting moving bodies approaching a store and transmitting electronic advertisements to these moving bodies from the store.

(0005)

(MEANS FOR SOLVING THE PROBLEM) The distinguishing characteristic of the present invention for achieving this objective is an electronic advertisement method for transmitting advertisement

information from an advertisement transmission source to moving bodies, wherein: the positions of the moving bodies are detected; the identification numbers of moving bodies within a prescribed distance from the advertisement transmission source are detected using the detected position information; advertisement information is wirelessly transmitted to the moving bodies from the advertisement transmission source based on the identification numbers; and the moving bodies receive this advertisement information; whereby the advertisement information is transmitted only to moving bodies within the prescribed distance from the advertisement transmission source. Here, "advertisement" refers to general information transmission, not only advertising and advertisement for sales.

(0006

(OPERATION) In an electronic advertisement service which electronically transmits advertisement information from a store, the present invention more effectively transmits advertisements by obtaining the IDs (telephone numbers) of moving bodies approaching the store using a means for detecting these moving bodies based on changes in their position information and their movement route (road) information and then sending electronic advertisements only to these moving bodies.

(0007) By periodically collecting the position information of a moving body, the movement direction of the moving body can be found. The movement route can be found from the position and movement direction of the moving body and from road map information. A moving body approaching the store and its communication ID can be known from its movement direction and the position information of the store. Effective advertising can be performed by transmitting electronic advertisements only to moving bodies approaching the store.

(0008)

(EXAMPLES OF EMBODIMENT) Fig. 1 shows the general configuration of a system in an embodiment. Symbol 1 is a store which transmits advertisements, 2 is a moving body capable of receiving advertisements (depending on the mode, reception can be rejected), 3 is a movement management center, and 4 is an infrastructure for position detection such as GPS.

· 域域内1000年度12年度

(0009) Fig. 6 shows the detailed system configuration of the embodiment. In Fig. 6, 1 is a store having a communications device and an electronic advertisement transmission device. Symbol 2 is a moving body having a position detection device, an electronic advertisement reception device (with reception/no-reception modes) and a moving body communications device. Symbol 3 is a movement management center having a store database, a moving body management database, an approaching moving body detection device and a communications device.

(0010) An outline of this service will be described using an example of a gas station advertisement.

(0011) An outline of the service from the perspective of a moving body is as follows.

(0012) (1) When each moving body would like to refuel at a gas station, it sets the advertisement reception device of the moving body to the advertisement reception mode (10).

(2) Electronic advertisement information is sent to this moving body from multiple gas stations in the traveling direction of the moving body using the moving body communications [device].

(3) The user of the moving body selects an acceptable gas station and then, following the advertisement information, enters the gas station, stops, and receives service.

(0013) The flow of operations of the system will be described using Fig. 4 and 5.

(0014) Fig. 4 shows the flow of operations and information exchanged between the moving body, the movement management center and the store.

(0015) Fig. 5 describes the detailed content of each piece of information shown in Fig. 4.

(0016) (1) Each advertisement transmitting store 1 registers its own position, the store classification and the targeted advertisement range (area designation, direction designation and vehicle type designation) in movement management center 3 (12).

(2) When each moving body 2 is placed in the advertisement reception mode as a result of settings made by the user (10), it registers its own ID (telephone number) in movement management center 3. This registration is deleted when the reception mode is terminated.

(3) Each moving body 2 in the advertisement reception mode periodically detects its own position using 4 (16) and transmits this position information to movement management center 3.

(4) Movement management center 3 detects changes in position for each registered moving body and detects the present area, the traveling route (road) and the traveling direction. At this time, the moving body may also be considered to be approaching even if its positional coordinates are moving away due to the curvature of the road (Fig. 2).

(5) Movement management center 3 classifies the information obtained in (4) for each road and area and manages it in a table together with the moving body telephone numbers (Fig. 3).

(6) Movement management center 3 notifies the relevant registered

store 1 of the ID information (telephone numbers, vehicle types, etc.) of approaching moving bodies which meet the conditions designated in (1).

(7) Registered store 1 transmits electronic advertisement information (store name, prices, service features, navigation map information, etc.) to each moving body 2 approaching the store using the IDs obtained in (6).

(0017)

(EFFECT OF THE INVENTION) As explained above, the present invention electronically transmits advertisement information only to moving bodies in the vicinity of a store and is therefore possible to conduct effective advertisement.

(Fig. 1) shows the general configuration of a system in an embodiment of the present invention.

(Fig. 2) shows the relationship between positional coordinates and curves in the road.

(Fig. 3) shows the information managed by the movement management center.

(Fig. 4) shows the flow of operations of the present invention.

(Fig. 5) shows the detailed content of each piece of information.


(Fig. 6) shows the system configuration of the present invention. (EXPLANATION OF REFERENCES)

1 Store


2 Moving body

3 Movement management center

4 Position detection means




General configuration of a system based on the present invention



Example in which a moving body is considered to be approaching even though its coordinates are moving away using road map information

(Fig. 3)

Route 134 Yokosuka Area Inbound	Route 134 Yokosuka Area Inbound	
129-4567	321-7854	
987-6543	789-3456	

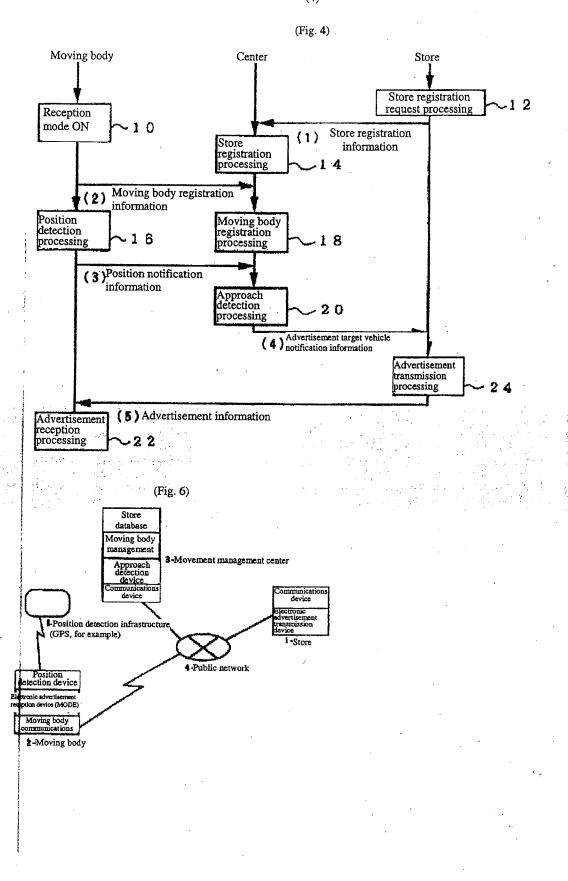

(Fig. 5)

(1) Store registration information

Latitude/longitude

Store classification (family restaurant)

Telephone number

Target area designation

Route 134, Yokosuka area

Target vehicle type designation

Private vehicle, truck

Inbound line only

(2) Moving body registration information

Latitude/longitude

Vehicle information (vehicle type, number of people)

Telephone number

Target business type

Restaurant

(3) Notification position information

Latitude/longitude	
 Telephone number	
4	

(4) Advertisement target vehicle notification information

	Telephone number	
	Vehicle information	1.1
٠.	Vehicle type/number of p	eople
	Latitude/longitude	1 7
	Area information	12.1

(5) Advertisement information

Store name	7 -
Classification (restaurant)	
Service menu	
Navigation information	

Continued from the front page

(72) Inventor

Kazuo Sakai

c/o Nippon Telegraph & Telephone Corporation 1-1-6 Uchisaiwai-cho, Chiyoda-ku, Tokyo